

A FINITE ELEMENTS MODEL EMBEDDING PIEZOELECTRIC PATCHES

Cinefra Maria , Valvano Stefano, Carrera Erasmo

Politecnico di Torino
Department of Mechanical and Aerospace Engineering
Corso Duca degli Abruzzi, 24
10129, Torino, Italy
e-mail: stefano.valvano@polito.it, web page: <http://www.mul2.com>

Keywords: Piezoelectric materials, Patched actuators and sensors, Multifield problems, Shell and Plate, Unified Formulation, Mixed Interpolated Tensorial Components.

Smart structures differ from the conventional ones by the presence of elements able to perform as actuators and/or sensors, allowing the structure itself to adapt and/or sense to the external environment. This capability leads to a wide range of applications, in particular in the aerospace field. Among materials that can be used, only piezoelectric ones have shown the capability to perform effectively both as actuators and sensors. Another advantage of piezoelectric materials is the simple integration with composite structures. The present work deals with the analysis of multilayered plates and shells embedding piezoelectric patches as actuators and sensors, see Fig. 1 and Fig. 2. Finite elements with layer-wise capabilities are employed to ensure an accurate description of the mechanical and electric fields in the layers. It is essential to take into account the discontinuity of the mechanical and electrical properties at the layer interfaces. For these reasons, the use of classical plate theories based on Kirchhoff and Reissner-Mindlin hypotheses can lead to inaccurate results. Even if analytical models are available, the solution of practical problems often demand the use of computational methods such as the finite element method. To this aim, the refined shell elements, recently formulated by the authors on the basis of Carrera Unified Formulation (CUF), have been extended to the electro-mechanical problem. The governing equations are derived using the Principle of Virtual Displacements (PVD) extended to the electro-mechanical case. The Mixed Interpolated Tensorial Components (MITC) method is employed to contrast the membrane-shear locking phenomenon that usually affects shell finite elements. This formulation has already shown all its potentiality as a base for finite elements in the mechanical analysis of multilayered shells [1].

Moreover, plate finite elements based on CUF for the analysis of electro-mechanical problem have been already presented in [2]. One of the most interesting features of the unified formulation consists in the possibility to keep the order of the expansion of the state variables along the thickness of the plate as a parameter of the model. In so doing, both equivalent single layer (ESL) and layer-wise (LW) descriptions of the variables are allowed. The electrical potential assumption for the patched actuators and sensors has been limited to a LW description while the displacements assumption on the composite layers both equivalent single layer (ESL) and layer-wise (LW) descriptions are allowed. This feature is particularly suitable since electric degrees of freedom (dofs) are often avoided for plate/shell elements or a simple through-thickness linear variation is assumed for the electric potential. The linear through-thickness hypothesis for the

electric potential, as demonstrated by Benjeddou [3], neglects systematically the contribution of the induced potential leading to a partial electromechanical coupling. Some results from the static and dynamic analysis of plates and shells under electro-mechanical loads will be provided, in order to show the efficiency of models presented, and compared with some results present in literature [4].

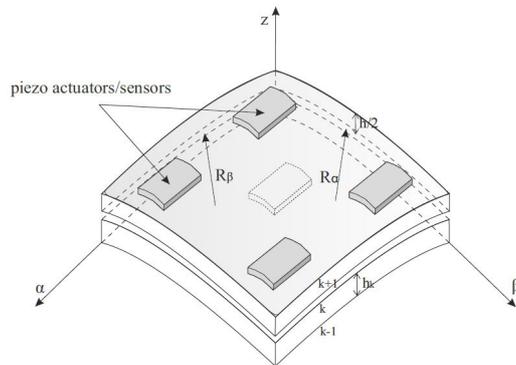


Fig. 1. Shell with patched piezoelectric actuators/sensors.

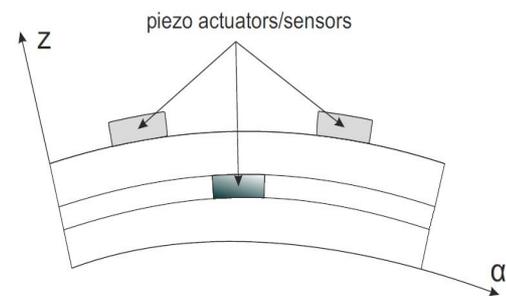


Fig. 2. Shell section with piezo patches.

References

- [1] M. Cinefra and E. Carrera., Shell finite elements with different through-the-thickness kinematics for the linear analysis of cylindrical multilayered structures, *International Journal for Numerical Methods in Engineering* 93, 160–182, (2013).
- [2] A. Robaldo, E. Carrera and A. Benjeddou, A unified formulation for finite element analysis of piezoelectric adaptive plates, *Computers and Structures* 84, 1494–1505, (2006).
- [3] A. Benjeddou, Advances in piezoelectric finite element modeling of adaptive structural elements: a survey, *Computers and Structures* 76, 347–363, (2000).
- [4] Yasin, M. Y., Ahmad, N., Alam, M. N., Finite element analysis of actively controlled smart plate with patched actuators and sensors. *Latin American Journal of Solids and structures* 7, 227–247, (2010).